



CONDENSER MICROPHONE SET WIRELESS SYSTEM

Manual

CERTIFICATION

This Class B digital apparatus complies with Canadian ICES-003.

IC Caution: RSS-Gen Issue 4 December 2014" & "CNR-Gen 4e Décembre 2014:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Radio Approvals:

FCC Part 15.249, FCC Part 15 B, RSS-210 (Canada), EN 300 440 (Europe), EN 301.489 (Europe), Japan Radio 2.4GHz Band (Japan), MIC ARIB STD-T66 (Japan), California 65, CE.

FCC CERTIFICATION

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND
- (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

Warning: Changes or modifications not expressly approved in writing by Xvive may void the users authority to operate this equipment.

RF Exposure Statement: This transmitter must not be co-located or operated in conjunction with any other antennae or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installa-

tion. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This Class B digital apparatus complies with Canadian ICES-003.



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK,
DO NOT REMOVE SCREWS.
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK,
DO NOT EXPOSE THE APPLIANCE TO RAIN OR MOISTURE.



Hereby, **SHENZHEN FZONE TECHNOLOGY CO., LTD**,
declares that this type of equipment is in compliance with
the essential requirements and other relevant
provisions of Directive 2014/53/EU

SAFETY INSTRUCTIONS FOR LITHIUM-ION RECHARGEABLE BATTERIES

If abused or misused, the rechargeable batteries may leak. In extreme cases, they may even present a risk of explosion, fire, heat, smoke or gas. Xvive does not accept any liability for damage arising from abuse or misuse.

- Keep away from children.
- Only charge rechargeable batteries with chargers recommended by Xvive.
- Observe correct polarity.
- Pack/store charged rechargeable batteries so that the terminals cannot contact each other (danger of shorting out/fire hazard).
- Do not expose to moisture.
- Switch rechargeable battery-powered products off after use.
- Only charge rechargeable batteries at ambient temperatures between 10°C/50°F and 40°C/104°F.
- When not using rechargeable batteries for extended periods of time, charge them regularly (about every three months).
- Do not mutilate or dismantle.

- Do not heat above 60°C/140°F, e.g. do not expose to sunlight or throw into a fire.
- Immediately remove rechargeable batteries from obviously defective products.
- Do not continue to use defective rechargeable batteries.
- Only use rechargeable batteries specified by Xvive.
- Dispose of rechargeable batteries at special collection points or return them to your specialist dealer.
- Store the products in a cool and dry place at room temperature (approx. 20°C/68°F).
- Remove the rechargeable batteries if the products will not be used for extended periods of time.

INFORMATION ABOUT COLLECTION AND DISPOSAL OF OLD ITEMS AND USED BATTERIES

These symbols on the products, packaging, or on any documents in the package mean it is incorrect to mix the used electrical and electronic products and batteries with general household garbage.

To protect our environment, please take old products and used batteries to proper collection places, and follow your national legislation and the Directives 2012/19/EU and 2006/66/EC.

To deal with these old products and batteries properly, please help to save valuable resources and prevent any possibility of side effects on human health and our environment due to the inappropriate disposal of the old products and used batteries.

You can contact your local authority for getting more helpful information on how to dispose the recycling and collection of the old products and batteries.

[For business users in the European Union]

If you want to discard electrical and electronic item, please contact your dealer or supplier for further information.

[Information on Disposal in other Countries outside the European Union]

These symbols are only valid in the European Union. Please contact your local authorities or dealer for more information on disposal of old items and used batteries.



IMPORTANT SAFETY INSTRUCTIONS
PLEASE READ THESE INSTRUCTIONS AND KEEP THEM
IN A SAFE PLACE



WARNING: BEFORE USING YOUR XVIVE U3C MICROPHONE WIRELESS SYSTEM,
CAREFULLY READ THE OPERATING INSTRUCTIONS.

1. Carefully observe all instructions in the U3C manual
2. Do not to perform service operations beyond those described in the U3C Manual. Service is required when the apparatus was damaged in any way, such as:
 - liquid was spilled or objects were dropped into the device,
 - the unit was exposed to rain or moisture,
 - the unit does not operate normally or significant changes in performance occur,
 - the unit is dropped or the housing is damaged.
3. Do not place near heat sources, such as radiators, heating ducts, or appliances which produce heat.
4. Guard the device against objects or liquids entering the device. Do not use or store the unit close to water.
5. Clean only with a damp cloth.
6. Only use attachments/accessories specified by the manufacturer.
7. Prolonged listening at high volume levels may cause irreparable hearing loss and/or damage. Always be sure to practice "safe listening."

U3C SET PRODUCT INTRODUCTION


- 2.4 Ghz band is ideal for wireless systems for dynamic microphones and it is approved for use worldwide.
- Less than 5 ms latency, simultaneous transmission on 6 channels
- Wide frequency response range 20 Hz – 20 kHz
- Range up to 27 m / 90 feet (actual range depends on RF signal absorption, reflection and interference)
- 3 - 7 Hours of battery life, depending on the microphone phantom power current (rechargeable battery for both Transmitter & Receiver)
- Works only with balanced XLR condenser microphone
- High resolution audio at 24-bit/48kpbs
- Dynamic range 110 dB
- Signal-to-Noise ratio 110 dB
- The U3C Wireless System is designed to take the complexity and frustration out of traditional wireless microphone systems and helps you create a flexible all-in-one solution that turns any dynamic microphone into a wireless microphone.
- Provides 12 V or 48 V phantom power to the condenser microphone.

!!Never plug unbalanced or dynamic microphones into the U3C. They can be permanently damaged if phantom power is applied!!


PACKAGE DETAILS

U3C Transmitter	1x
U3 Receiver	1x
USB Cable	1x
Manual	1x
Bag	1x

QUICK START

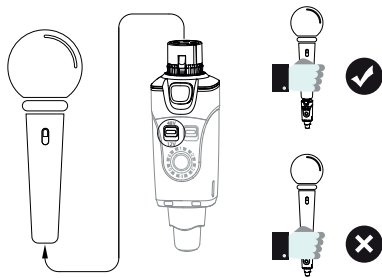


1. Plug the transmitter into your XLR condenser microphone.
Switch phantom power to 12 v or 48 V.
WARNING: Never plug unbalanced or dynamic microphones into the U3C.



2. Plug the Receiver into the Mixer.

QUICK START



3. Turn transmitter and receiver on and check that they operate on the same channel.




4. The LED on the transmitter will be lit continuously after the connection was established successfully.




5. Check the connection by talking through the microphone.

BASIC OPERATION U3C TRANSMITTER



- ① Mic In: XLR condenser microphone input jack
- ② Spring: circumferential spring provides ground connection to metal housing parts
- ③ Mic lock: secures transmitter to the microphone
- ④ Output phantom power voltage switch: 12 V or 48 V
- ⑤ Power switch: switches unit on/off
- ⑥ Channel status LED: indicates selected channel
- ⑦ Channel switch: selects channels 1-6
- ⑧ USB charging port
- ⑨ Power status LED: indicates power status:
Led off = 100% ~ 30%
Solid red = 29% ~ 11%
Blinking red = less than 10%
- ⑩ Antenna.

BASIC OPERATION U3 RECEIVER



- ① XLR OUT: XLR microphone input jack
- ② Power switch: switches the unit on and off
- ③ Channel status LED: indicates selected channel
- ④ Channel switch: selects channels 1-6
- ⑤ USB charging port
- ⑥ RF Status LED:
 - ON = Transmitter is on and link is established
 - Flashing = Signal connection interference
 - OFF = Transmitter off or not linked
- ⑦ Power status Led: indicates power status.
 - Led off = 100% ~ 30%
 - Solid red = 29% ~ 11%
 - Blinking red = less than 10%
- ⑧ Antenna.


SPECIFICATIONS

U3C MICROPHONE WIRELESS SYSTEM


Transmission bandwidth	2400 – 2483.5 MHz
Working range	Up to 27 m / 90 feet. Actual range depends on RF signal absorption, reflection and interference.
Audio frequency response	20 Hz - 20 kHz (-3 dB). Depending on microphone type or input signal.
Dynamic range	110 dB
Battery life	Up to 3 - 7 hours (depending on microphone current)
RF sensitivity	-88 dBm
Total harmonic distortion	0.2%
RF output power	10 mW E.I.R.P. max
Operating temperature range	-18°C to 57°C. Battery characteristics may limit this range.
Number of channels	Up to 6 channels.

	U3C TRANSMITTER	U3 RECEIVER
Dimensions	31 X 29 X 98 mm	31 X 29 X 98 mm
Weight	108 g	92 g
Housing	Molded plastic and cast metal	Molded plastic and cast metal
Battery	3.7 V rechargeable Li-Ion, 1000 mA	3.7 V rechargeable Li-Ion, 860 mA
Impedance	Input 15 k Ω (1 KHz)	Output 470 Ω (1 KHz)
Audio input connector	Balanced XLR male input	
Audio output connector		Balanced XLR female output
Maximum input level	Mic mode: 2.8 Vp-p	
Maximum output level		2.8 Vp-p
Battery life	Phantom Power: 12 V 2 mA - 7 hours 48 V 2 mA - 6 hours 48 V 5 mA - 3 hours	Up to 5 hours
Supported microphone types	Condenser microphones	
Antenna impedance	50 Ω	50 Ω
Antenna type	1/4 wave sleeve dipole, non-removable	1/4 wave sleeve dipole, non-removable
Number of antennae	1	2

BATTERIES AND CHARGING



Connect Power



Connect to the outlet

Note:

Turn off the power switch while charging.
Please do not use the U3 / U3C when charging.
This may reduce battery life.


U3C set

CHARGING TIMES		BATTERY LIFE
		12 V 2 mA – 7 hours
U3C Transmitter	2 hours	48 V 2 mA – 6 hours
		48 V 5 mA – 3 hours
U3 RECEIVER	2 hours	Up to 5 hours

Always store U3C at room temperature

When storing the unit, please check the battery state regularly and charge if necessary.

U3C Phantom Power Connections

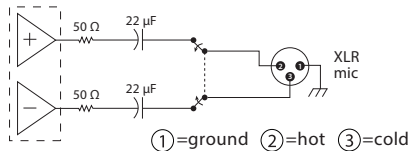

2.4 GHz WIRELESS OVERVIEW AND INTERFERENCE

The U3 operates in the 2.4 GHz ISM band, the same band used by Wi-Fi, Bluetooth, and other wireless systems. 2.4 GHz is an open band and as such does not require a license to operate worldwide.

Tips and Methods to improve the performance of the wireless system

- 1) Keep more than 3 meters distance between the U3 receiver and other transmitters such as Wi-Fi routers.
- 2) If you experience interference from Wi-Fi devices in the vicinity, try changing to a different channel on the U3 transmitter and receiver.
- 3) If necessary, shorten the distance between the U3 receiver and transmitter.

2.4 Ghz Frequency Tables

CHANNEL 1	2402 MHz, 2480 MHz, 2482 MHz
-----------	------------------------------

CHANNEL 2	2408 MHz, 2472 MHz, 2474 MHz
-----------	------------------------------

CHANNEL 3	2416 MHz, 2464 MHz, 2466 MHz
-----------	------------------------------

CHANNEL 4	2434 MHz, 2440 MHz, 2442 MHz
-----------	------------------------------

CHANNEL 5	2427 MHz, 2448 MHz, 2450 MHz
-----------	------------------------------


CHANNEL 6	2422 MHz, 2456 MHz, 2458 MHz
-----------	------------------------------

U2 channels 1-4 use the same frequencies as U3/U3C/U4 channels 1-4. A maximum of six U2/U3/U3C and U4 sets can be used at the same time.

TROUBLESHOOTING

ISSUE	SOLUTION
No sound	<ul style="list-style-type: none">• Check that the U3 Receiver's RF LED is lit.• Check that the microphone is turned on and that you receive a signal from the U3 transmitter.• Check that the power switch is turned on for both the Transmitter and the Receiver.• Ensure that the U3 Transmitter and Receiver are on the same channel.• The U3C will provide 12V or 48V phantom power to condenser microphone. Please select your microphone phantom power volts.• The Receiver can only be paired with one Transmitter at a time.
Distortion or weak sound	<ul style="list-style-type: none">• If you connect a microphone to the receiver, make sure that it uses a balanced XLR interface.
Signal instability: RF LED flickering, or off completely	<ul style="list-style-type: none">• See, "Tips and methods to improve wireless system performance" page 15
Unable to switch the channel	<ul style="list-style-type: none">• The channel switch locks after 15 seconds. Double-click the channel button to unlock and reset.
Multiple connect	<ul style="list-style-type: none">• One transmitter can be used with multiple receivers on the same channel.
Phantom power	<ul style="list-style-type: none">• Never plug unbalanced or dynamic microphones into the U3C. They can be permanently damaged if phantom power is applied!!

APPLICATION EXAMPLE

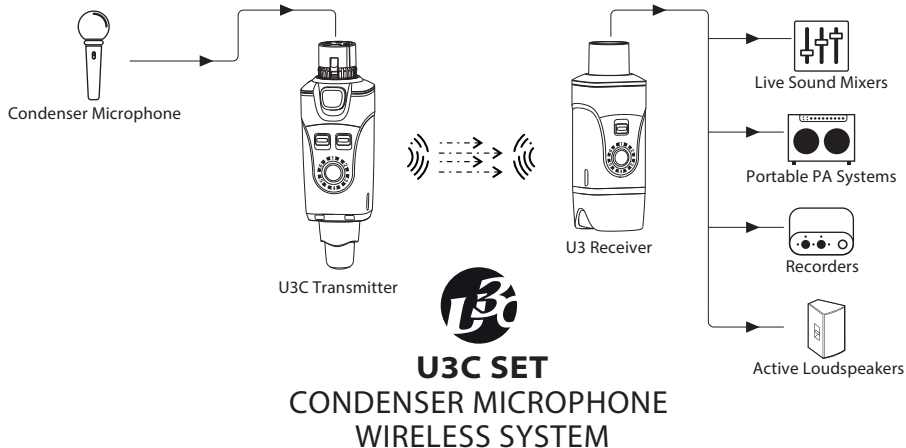



SHENZHEN FZONE TECHNOLOGY CO., LTD.

2nd floor, Building 12, Xicheng Industrial Area, Xixiang Town,
Baoan District, Shenzhen Guangdong China. 518101

E-mail: support@xvive.com

www.xvive.com

CHINA PATENT NUMBERS ZL 2016 3 0165464.8

Note: The manufacturer reserves the right to change these specifications without notice.