


INSTALLATION INSTRUCTIONS

Correct string radius is achieved using three saddle heights. Saddles are numbered (on the bottom of each saddle) **1** (lowest height), **2** (middle height) and **3** (highest), and should be installed in the following order:

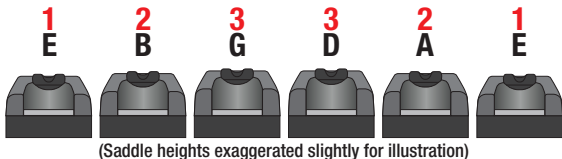

1. Insert string end in hole at base of string block cavity.
2. GENTLY tighten screw until it just touches the string.
3. Tighten with allen key an additional 1/4 TURN ONLY.

CAUTION: Excessive tightening is not required to keep string in place. Overtightening screw may crack the housing and void your warranty. Questions? Phone 604-940-5353, visit our website at www.graphtech.com or e-mail sales@graphtech.com